

893 CONCEALED DOOR CLOSER

SPECIFICATIONS

The Sabre 893 Bottom Rail Concealed Door Closer includes the same world-wide patented technology as its glass door equivalent, the 8835 Glass Patch Door Closer. It has the same highly efficient hydraulic mechanism which makes it easy to open with the minimum of effort. Visually it's perfect as it is completely concealed within the door itself. Due to it possessing a hydraulic mechanism it can be controlled just like other hydraulic closers so you can easily adjust the latching and closer

speeds without the need to remove from the door once installed. It also has the benefit of an adjustable base plate to help align the door if it is slightly out during installation. It is simple to maintain and keep clean and suitable for high traffic doors like kitchens or for any timber door application that requires double action opening. Note: Top Pivot not supplied with product.

NON-HOLD OPEN

SAB-BR893-NHO-SSS

- Size 3 Fixed
- Door Weight up to 60kg
- Up to 950mm Wide Doors
- Minimum Door Thickness 40mm
- Non Handed

HOLD OPEN 90°


SAB-BR893-90HO-SSS

- Size 3 Fixed
- Door Weight up to 60kg
- Up to 950mm Wide Doors
- Minimum Door Thickness 40mm
- Non Handed





DIAGRAMS

BODY DIMENSIONS

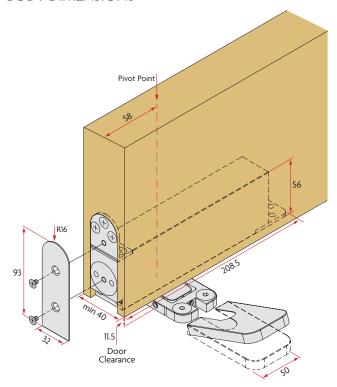


BASE PLATE DOOR ALIGNMENT






DOOR SWING

1. Closing Range 150° – 10° 2. Latching Range 10° – 0 90° Hold Open (optional)



DOOR PREP



RELATED PRODUCTS







